


STATUS: Standard  
CLASSIFICATION OF EQUIPMENT: Unclassified  
USING SERVICE: Army  
DATE OF THIS SHEET: 29 Dec 51

**AN/FGC-TYPE**

AN/COMP TYPE NUMBER: SB-66/FGC  
SWITCHBOARD

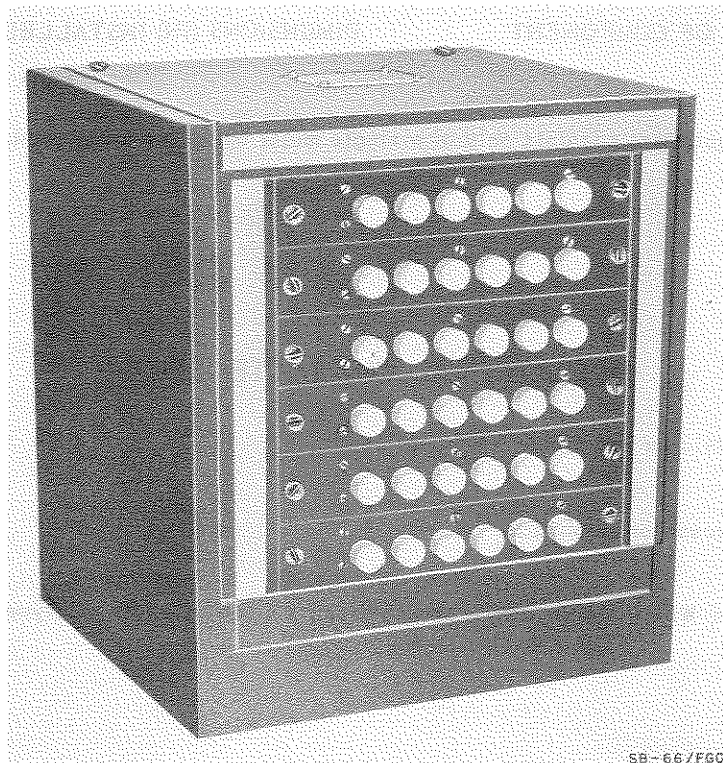

SB-66/FGC

Switchboard SB-66/FGC is a PBX-type switchboard for interconnecting up to 6 teletypewriters in a small network, with provision for grouping or conference circuits. It is designed for small fixed station applications.

This equipment consists of a single cordless, manual switchboard unit with a maximum capacity of six teletypewriter lines. All 6 lines may be used simultaneously.

Two Switchboard SB-66/FGC may be connected together to serve 12 teletypewriters, but only 6 lines may be in use at any one time.

No provision is made for signaling the operator, since this equipment usually is used in circuits requiring switching on a prescheduled basis.

<b>AN/FGC-TYPE</b>		INSTRUCTION LITERATURE: TM 11-2083
SB-66/FGC :AN/COMP TYPE NUMBER		CLASSIFICATION OF EQUIPMENT: Unclassified
SWITCHBOARD		USING SERVICE : Army
		DATE OF THIS SHEET : 29 Dec 51

**MAJOR COMPONENTS**

QUANT	NAME OF COMPONENT	DIMENSIONS (IN) INSTALLED	WEIGHT (LBS)
-------	-------------------	---------------------------	--------------

(Equipment consists only of a single major operating component.)

**OPERATIONAL CHARACTERISTICS**

**TACTICAL USE:** Division and higher headquarters .

**INSTALLATION:** Ground or shipboard.

**CAN COMMUNICATE WITH:** Provides teletypewriter PBX facilities for teletypewriter equipment of a small network.

**TECHNICAL CHARACTERISTICS**

**NUMBER OF SWITCHBOARD POSITIONS:** 1.

**NUMBER AND TYPE OF CIRCUITS:**

Number of line circuits: 6.

**PHYSICAL CHARACTERISTICS**

Switchboard SB-66/FGC measures 7-3/4x9x7 inches, volume 0.28 cu ft. Packed for domestic or export shipment: total weight 40 pounds, total volume 1.4 cu ft. Shipped in 1 package.