

STATUS: Limited Standard

CLASSIFICATION OF EQUIPMENT: Unclassified

USING SERVICE: Army


DATE OF THIS SHEET: 22 Jan 52

**AN/FIC-TYPE**

AN/COMP TYPE NUMBER:

LS-129/FI

INTERCOMMUNICATING STATION

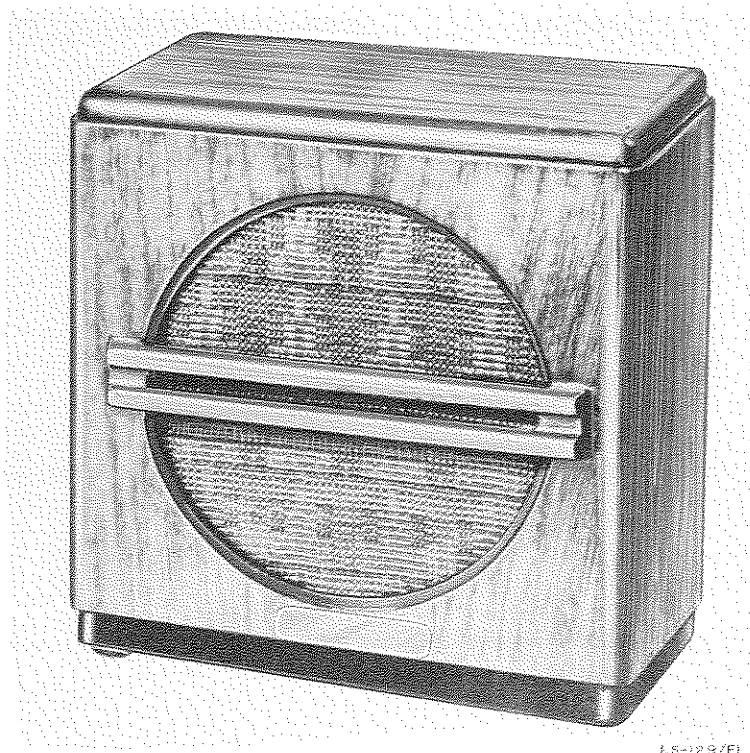

LS-129/FI

Intercommunicating Station LS-129/FI is a speaker microphone equipment used in an intercommunication system. It is used in headquarters buildings, depots, communications centers, and similar installations.

This equipment consists of a speaker microphone housed in a wooden cabinet. It cannot initiate calls to other speaker microphone units or to the master station unit of a system in which it is used.

In an emergency, it can be used in 500-ohm impedance systems, but with reduced efficiency.

It may be used with Intercommunicating Station LS-125/FI and is powered by the master station unit of the system.

<b>AN/FIC-TYPE</b>		INSTRUCTION LITERATURE: TM 11-2572
LS-129/FI	:AN/COMP TYPE NUMBER	CLASSIFICATION OF EQUIPMENT: Unclassified
INTERCOMMUNICATING STATION		USING SERVICE : Army
		DATE OF THIS SHEET : 22 Jan 52

### MAJOR COMPONENTS

QUANT	NAME OF COMPONENT	DIMENSIONS (IN) INSTALLED	WEIGHT (LBS)
-------	-------------------	---------------------------	--------------

(Equipment consists only of a single major operating component.)

### OPERATIONAL CHARACTERISTICS

**TACTICAL USE:** Fixed plant intercommunication in buildings at posts, camps, and stations.

**INSTALLATION:** Fixed plant.

**CAN COMMUNICATE WITH:** Master control stations of the system in which it serves as a listening station or talk-back unit.

### TECHNICAL CHARACTERISTICS

**FACILITIES AFFORDED:** Local intercommunication station.

**POWER OUTPUT:** 2 w.

### PHYSICAL CHARACTERISTICS

Intercommunicating Station LS-129/FI measures 7-3/8 x 3-3/4 x 7-1/8 inches, net weight 4.25 pounds, volume 0.125 cu ft.