STATUS: Standard

CLASSIFICATION OF EQUIPMENT :Unclassified

USING SERVICE: Army


DATE OF THIS SHEET: 25 Jan 52

AN/FTC-TYPE

AN/COMP TYPE NUMBER:

SB-55/FTC

TELEPHONE SWITCHBOARD

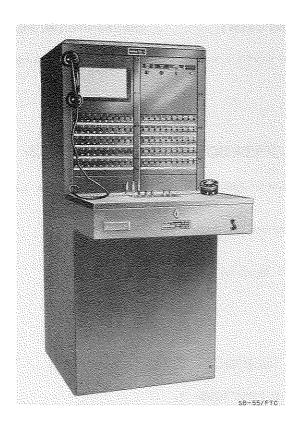

Telephone Switchboard SB-55/FTC is a manual, single-position, two-panel, switchboard used for fire-reporting and similar applications at posts, camps, and stations.

This equipment consists of a single floor-type desk unit having a 100-line capacity, three cord circuits, and two trunks operated by two 3-position keys. The trunks may be manual- or dial-operated.

It includes a handset for the operator and requires 48 v of battery and 20-cyc ringing current.

Switchboards SB-55/FTC and SB-55A/FTC are interchangeable but differ in line circuit, and are otherwise similar.

AN/FTC-TYPE

SB-55/FTC

:AN/COMP TYPE NUMBER

TELEPHONE SWITCHBOARD

INSTRUCTION LITERATURE: TM 11-2084

CLASSIFICATION OF EQUIPMENT: Unclassified

USING SERVICE : Army

DATE OF THIS SHEET: 25 Jan. 52

MAJOR COMPONENTS

QUANT

NAME OF COMPONENT

DIMENSIONS (IN) INSTALLED

WEIGHT (LBS)

(Equipment consists only of a single major operating component.)

OPERATIONAL CHARACTERISTICS

TACTICAL USE: Fixed plant at army and higher headquarters; posts, camps, and stations.

INSTALLATION: Permanent and semipermanent comcenters.

CAN COMMUNICATE WITH: Used for fire reporting systems.

TECHNICAL CHARACTERISTICS

NUMBER OF SWITCHBOARD POSITIONS: 1.

NUMBER AND TYPE OF CIRCUITS:

Number of cord circuits: 3.
Number of line circuits: 100.

Number of trunk circuits. 2.

POWER REQUIREMENTS: 48 v.

PHYSICAL CHARACTERISTICS

Telephone Switchboard SB-55/FTC measures 38-1/4x24x57-1/4 inches, net weight 400 pounds, volume 30 cu ft. Packed for export shipment: total weight 600 pounds, total volume 40 cu ft, 2 ship tons. Shipped in 1 package both domestic and export.

CONFIDENTIAL—Security Information

ORIGINAL