


STATUS: Limited Standard
CLASSIFICATION OF EQUIPMENT: Unclassified
USING SERVICE: Army
DATE OF THIS SHEET: 7 Feb 52

AN/FTC-TYPE

AN/COMP TYPE NUMBER: SB-60/FTC
SWITCHBOARD

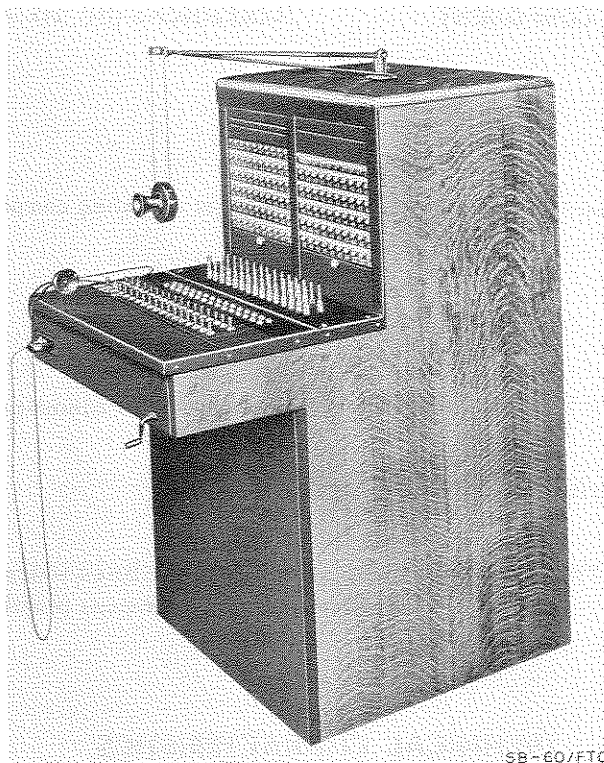

SB-60/FTC

Switchboard SB-60/FTC is a single-position, nonmultiple, manual, magneto telephone switchboard used in situations where line resistance, leakage, or other unfavorable plant conditions prohibit satisfactory common battery operation in the communications zone of a theater of operations.

This equipment is a floor-mounted, desk-type unit having combination drops (not shown in the illustration) and jacks arranged on 2 jack panels, and providing for 100 magneto lines, and 15 cords furnished and equipped for double drop supervision. There is also a 5-bar hand generator wired to a key for switching to power generator. An operator's telephone is included.

Local battery supply is furnished separately.

AN/FTC-TYPE		INSTRUCTION LITERATURE: None
SB-60/FTC	:AN/COMP TYPE NUMBER	CLASSIFICATION OF EQUIPMENT: Unclassified
SWITCHBOARD		USING SERVICE : Army
		DATE OF THIS SHEET: 7 Feb 52

MAJOR COMPONENTS

QUANT	NAME OF COMPONENT	DIMENSIONS (IN) INSTALLED	WEIGHT (LBS)
-------	-------------------	---------------------------	--------------

(Equipment consists only of a single major operating component.)

OPERATIONAL CHARACTERISTICS

TACTICAL USE: Used in the communications zone of a theater of operations.

INSTALLATION: Fixed plant.

CAN COMMUNICATE WITH: Used for magneto operation of facilities where line resistance, leakage, or other unfavorable conditions prohibit common battery operation.

TECHNICAL CHARACTERISTICS

NUMBER OF SWITCHBOARD POSITIONS: 1

NUMBER AND TYPE OF CIRCUITS:

Number of cord circuits: 15
Number of line circuits: 100.
Number of trunk circuits: 0.

POWER REQUIREMENTS: 3 v dc from dry cells.

PHYSICAL CHARACTERISTICS

Switchboard SB-60/FTC weighs 390 pounds net, volume 24 cu ft. Packed for export shipment: total weight 575 pounds, total volume 40 cu ft, 1 ship ton. Shipped in 1 package.