

STATUS: Limited Standard

CLASSIFICATION OF EQUIPMENT: Unclassified

USING SERVICE: Army


DATE OF THIS SHEET: 7 Feb 52

AN/FTC-TYPE

AN/COMP TYPE NUMBER:

SB-63/FTC

SWITCHBOARD

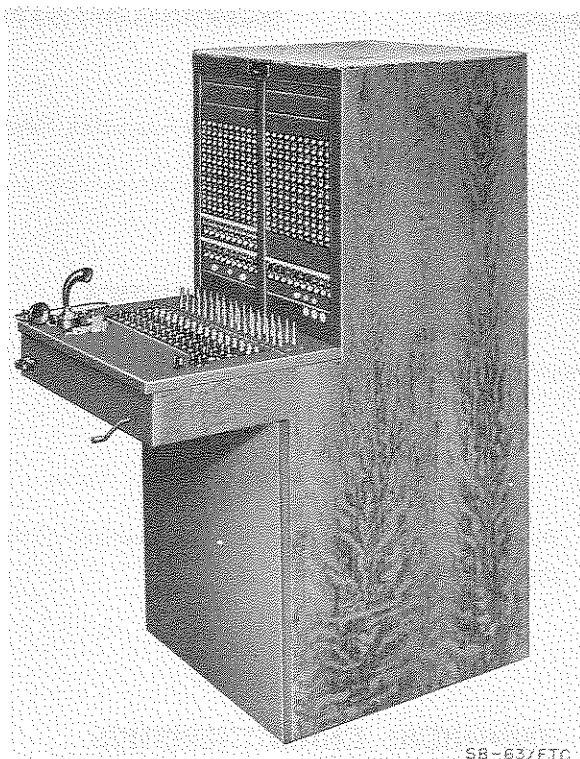

Switchboard SB-63/FTC is a single-position, manual, common-battery telephone switchboard used in the communications zone of a theater of operations.

This equipment consists essentially of a commercial (Kellogg Jr. Masterbuilt) telephone switchboard of the floor-mounted, desk-type having 2 jack-panels and equipped for 40 common-battery, 40-universal, 20 magneto (with lamp signaling) lines, and wired for 20 (equipped for 10) dial trunks. It has 15 universal cord circuits, a hand generator for emergency ringing and an operator's telephone set.

Uses 24-v battery, but ringing current and battery must be furnished separately.

AN/FTC-TYPE		INSTRUCTION LITERATURE: None
SB-63/FTC	: AN/COMP TYPE NUMBER	CLASSIFICATION OF EQUIPMENT: Unclassified
SWITCHBOARD		USING SERVICE: Army
		DATE OF THIS SHEET: 7 Feb 52

MAJOR COMPONENTS

QUANT	NAME OF COMPONENT	DIMENSIONS (IN) INSTALLED	WEIGHT (LBS)
-------	-------------------	---------------------------	--------------

(Equipment consists only of a single major operating component.)

OPERATIONAL CHARACTERISTICS

TACTICAL USE: Used in communications zone.

INSTALLATION: Fixed plant.

CAN COMMUNICATE WITH: Provides single-position, manual, common-battery facilities in fixed plant installations.

TECHNICAL CHARACTERISTICS

NUMBER OF SWITCHBOARD POSITIONS: 1.

NUMBER AND TYPE OF CIRCUITS:

Number of cord circuits: 15.

Number of line circuits: 40 common battery; 40 universal, 20 magneto.

Number of trunk circuits: 10.

POWER REQUIREMENTS: 24 v dc.

PHYSICAL CHARACTERISTICS

Switchboard SB-63/FTC weighs 500 pounds net, volume 24 cu ft. Packed for export shipment: total weight 700 pounds, total volume 40 cu ft, 1 ship ton. Shipped in 1 package.